


MAC-Guard[™]
Acrylic Flooring System

ACRYLIC FLOOR SYSTEM

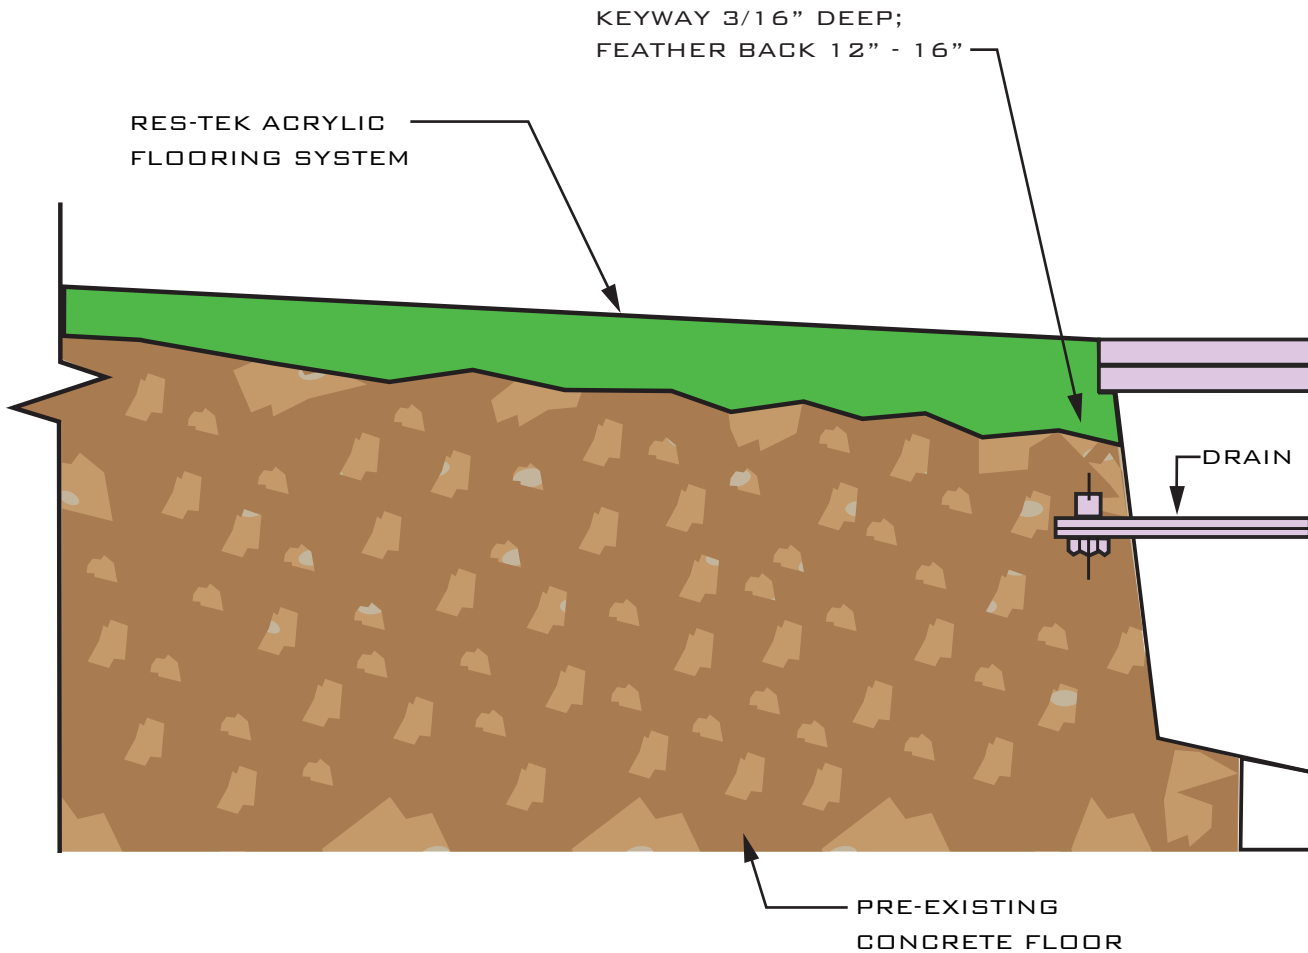

PROCESSES:

1. CHIP OUT CONCRETE 3/16" DEPTH AND CURTAIL 12" - 16" BACK
2. FINISH WITH RES-TEK ACRYLIC FLOORING FLUSH TO DRAIN TOP